

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: A61F 2/66	A1	(11) International Publication Number: WO 96/25898 (43) International Publication Date: 29 August 1996 (29.08.96)
(21) International Application Number: PCT/SE96/00215 (22) International Filing Date: 19 February 1996 (19.02.96) (30) Priority Data: 9500653-2 21 February 1995 (21.02.95) SE (71) Applicant (for all designated States except US): GRAMTEC INNOVATION AB [SE/SE]; Strömbacken 1, S-511 56 Kinna (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): GRAMNÄS, Finn [SE/SE]; Mor Kerstins Väg 22, S-511 56 Kinna (SE). (74) Agent: GÖTEBORGS PATENTBYRÅ AB; P.O. Box 5005, S-402 21 Göteborg (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Swedish).</i>

(54) Title: ADJUSTABLE PROSTHESIS JOINT**(57) Abstract**

An adjustable prosthesis joint, such as a prosthesis ankle or a prosthesis foot, and intended primarily for causing setting of the angular relation between an attachment means (4) forming part thereof for affixing the prosthesis joint (1) to a cooperating body part, and a detail (17) being angularly displaceably connected thereto, whereby the prosthesis joint is provided with means adapted to be actuable to permit or to prevent such angular displacement, respectively, whereby said means is constituted by two communicating chambers (3a, 3b) containing a flow medium, with a shiftable valve (13) provided between the chambers, and at least one body designed as a piston (8, 9), rotatably arranged in relation to said chambers and movably arranged therein and adapted to permit flow of flow medium between the two chambers, when the valve is open and under influence of an external shifting force being displaced in said chambers (3a, 3b) in order to alter the relative sizes thereof.

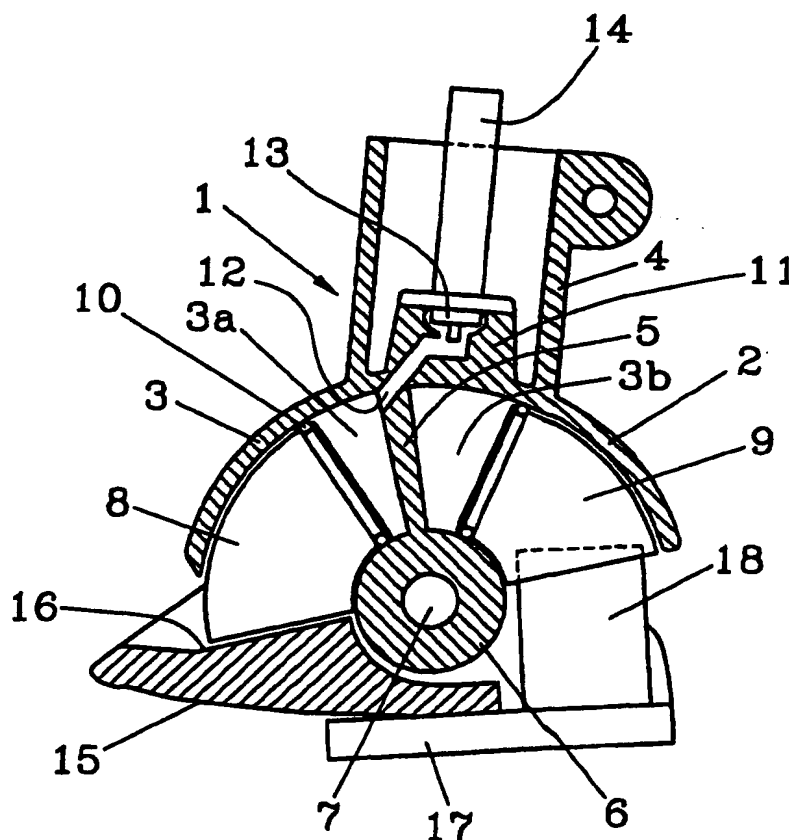

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

ADJUSTABLE PROSTHESIS JOINT

The present invention refers to an adjustable prosthesis joint, such as a prosthesis ankle or a prosthesis foot, of the type defined in the preamble of claim 1.

From SE-A-9001184-2 is known an artificial foot, with which is obtained a rapid, step-less and smooth adjustment of the foot angle for a foot blade forming part of the foot, at the same time as the foot blade is resilient. The solution presented in that patent operates in a good manner, but incorporates a number of mechanical components, such as struts, rails, ball and nut mechanism, braking and arresting means, which together give the construction a rather large number of components, which make the foot according to the patent rather expensive and space-demanding.

The purpose of the present invention is to provide an adjustable prosthesis joint, such as a prosthesis foot or the like, which has the same high functionality as the artificial foot according to the above-mentioned patent, but which incorporates a smaller number of mechanical components and therefore can be made less space-demanding and less expensive to manufacture than the older solution, and this has been achieved in that the construction has been given the features defined in the characterizing part of claim 1.

Hereinafter the invention will be further described with reference to an embodiment schematically illustrated in the accompanying drawings.

Fig. 1 shows in cross-section from the side an embodiment of an adjustable prosthesis ankle according to the invention, Fig. 2 is a corresponding view of a prosthesis foot according to the invention in a locked neutral position for a valve incorporated therein, and with load applied on the heel portion thereof,

Fig. 3 shows a somewhat modified prosthesis foot according to the invention in a cross sectional view corresponding to Fig. 1, in a position bent maximally backwards,
Fig. 4 is a corresponding view, which shows the foot
5 prosthesis according to Fig. 3 in a position maximally bent forward and with the valve in open position,
Fig. 5 is a view corresponding to Fig. 4 with open valve and in a position bent maximally backwards,
Fig. 6 is an end view seen straight from the front of the
10 valve housing according to Fig. 5,
Fig. 7 shows the valve housing in side view,
Fig. 8 illustrates the valve housing as seen straight from above,
Fig. 9 is a view of the lower side of the valve housing in
15 Fig. 6-8,
Fig. 10 shows an adjustable ankle joint according to the invention in side view,
Fig. 11 shows partially in cross-section how the ankle joint according to Fig. 10 can be used together with one of a
20 number of different, earlier known foot prosthesis, and
Fig. 12a-e illustrate schematically a further joint with which the prosthesis joint according to the invention can be built together for permitting lateral inclination.

25 In Fig. 1 is shown in cross-section an ankle joint prosthesis 1 according to the invention, which incorporates a housing 2 in the form of a substantially cylindrical, cross-sectionally circularly curved chamber 3 with a substantially straight socket 4 projecting essentially
30 radially from the curved envelope surface thereof, which socket is intended to be attached to a not shown lower bone portion in a not further shown, e.g. conventional manner.
In the middle portion of the cylindrical, curved chamber 3 there is provided a fixed, substantially radial intermediate
35 wall 5, which subdivides the chamber 3 into two substantially equally big, circularly curved, partially circular cylinders 3a, 3b and which is connected to a hub 6

with a rotational axis coinciding with the axis of curvature 7 of the cylinders. In each one of those two cylinders 3a, 3b there are provided a piston 8, 9 each, which are curved in a manner corresponding to that of the cylinder, which
5 pistons 8,9 are interconnected in such a manner, that they form a continuous pair of pistons with a constant mutual spacing. The pistons are sealed off against the cylinder walls with conventional sealing arrangements 10, e.g. O sealing rings provided in grooves.

10 In the embodiment shown in Fig. 1, the intermediate wall between the chamber 3 and the attachment socket 4 is designed as a valve housing 11 with a first channel 12 opening in one of the cylinders 3a in the chamber 3, and a
15 second channel, not visible in the figure, which opens in the second chamber 3b. In the valve housing 11 there is provided a rotatably arranged valve body 13, which in the position illustrated is open and therefor permits free communication between the two cylinders 3a, 3b. The valve
20 body 13 can be turned by means of an operating means 14, e.g. a turning lever, in the example shown arranged through the attachment cylinder. Connected to the ankle prosthesis 1 according to the figure is a foot plate 15 rotatably arranged about the hub 6, and which in the neutral position
25 shown has an upwardly facing surface 16 in contact with one of the pistons 8. The foot plate 15 in turn in this embodiment is connected to a heel plate 17, which supports a dampening body 18 of a flexibly compressible material, which is in contact with the other piston 9.

30 By the fact that the free space between each piston 8,9 and the opposed surface of the intermediate wall 5 enclose an appropriate flow medium, is it possible with an appropriate dimensioning of the channels to cause such a dampening of
35 the flow of flow medium between the different cylinders 3a, 3b in the open position of the valve body 13, that the attachment socket 4 very easily can be angularly adjusted to

a desired degree in relation to an associated foot plate or a foot blade.

5 By using as a flow medium a visco-elastic mass, e.g. a boron-siloxan-elastomer, it is obtained a number of advantages in this connection, as the visco-elastic mass does not have high requirements for sealing accuracy, This means that the manufacturing tolerances for the cooperating
10 sealing surfaces can be reduced, which contributes to a less expensive manufacturing. As a visco-elastic mass furthermore acts thus that it provides a bigger resistance to flow at more rapid movement it is possible to reduce the accuracy at manufacture of flow channels, valve housing and valve. In spite of theis, the invention is not limited to use of such
15 visco-elastic masses as flow medium, but also common hydraulic oils can be used, whereby however the demands on manufacturing tolerances are increased.

20 In Fig. 2 is shown in a view corresponding to Fig. 1 the invention construed as a prosthetic foot 21, whereby the only difference as compared to the ankle joint prosthesis 1 according to Fig. 1, is that the foot plate 15 is connected to a foot blade 19 having a heel 20. The foot blade is earlier known and can preferably be a sheet made of carbon
25 fibre material or the like. The flexibility thereof makes the foot blade 19 bend at walking to contact against the curvature of the lower surface of the foot plate 15.

30 In Fig. 3 is shown a modified embodiment of the prosthetic foot according to Fig. 2, whereby details in the two embodiments, which completely correspond to each other have been given the same reference numerals.

The prosthetic foot 21 thus in this case has an intermediate wall 5', which separates the two chamber cylinders 3a, 3b,
35 which houses the pistons 8, 9, said intermediate wall 5' being designed with a seating 22 for a rotatable valve body 23. In Fig. 3 the valve body 23 is in closed position, and

maintains thereby the foot angle constant, which is normal at walking. In the figure is illustrated treading down on the heel, whereby the dampening body 18 is compressed such as can be seen. When the heel portion at walking motion is relieved from load, the dampening body 18 will again expand to initial size.

When it is needed to alter the foot angle, e.g. in connection with certain sports activities, when changing between shoes of different heel heights, etcetera, the valve body 23 as shown in Fig. 4, is opened and the flow medium in the communicating cylinders 3a, 3b can flow between the two cylinders. When applying a pressure on the attachment socket 4 in either inclination, the two pistons 8 and 9 situated at a constant mutual distance will move in relation to the intermediate wall 5', whereby the inclination of the attachment cylinder 4 in relation to the foot blade will be altered. Hereby the volume of flow medium will increase on one side of the intermediate wall 5', whereas it is reduced to a corresponding degree on the other side of the intermediate wall. When the valve body 23 thereupon is shifted to closed position, (see Fig. 3), the prosthetic foot will have taken up a new, arrested angular position relative to the foot blade.

In Fig. 4 is shown this altered angular position in position leaning forward to a maximum, but as the valve body 23 can be opened and closed anywhere along the path of movement it is possible to provide a completely stepless adjustment.

In Fig. 5 is shown in a corresponding manner how the attachment socket 4, when the valve body 23 is open, has been moved to a maximum rearward leaning position, whereby the piston 8 situated closest to the foot plate 15, engages the foot plate 15, just as in the position according to Fig. 4. In this maximally rearwardly leaning angular position, the dampening block 18 is still not compressed, whereas the

space between the forward piston 8 and the intermediate wall 5' is the maximum space at the same time as the space between the rearward piston 9 and the intermediate wall 5' has its smallest size.

5

Fig. 6 shows in a planar front view the prosthesis joint according to the invention, with its housing 2, the attachment socket 4 and the curvature axis 7 of the hub.

10 Fig. 7 shows a planar side view of the housing 2 with its attachment socket 4 and the axis of curvature 7 thereof, and a possible arrangement for manouvering the valve of the prosthesis joint, whereby this arrangement incorporates a lever 24, with a shaft 25 rotatably supported in the
15 housing, which shaft is adapted to transfer the rotational movement of the lever to the valve body 23, and the free side of which can be connected to a manouvering cable 26, which can be operated by the bearer of the prosthesis in that this person pulls the cable and thereby opens the valve
20 when an angular adjustment is desired. A not shown spring is preferably arranged to return the valve to closed position when the pulling force in the cable ceases.

25 In Fig. 8 is shown the housing of the prosthesis joint in a planar view from above, and in Fig. 9 the same is shown in a planar view from underneath.

30 In Fig. 10 is shown in side view an embodiment of a prosthesis ankle, which is somewhat modified as compared to the prosthesis ankle according to Fig. 1. In this case the very prosthesis joint corresponds e.g. to the embodiment according to the prosthesis foot according to Fig. 3, whereas it on the other hand lacks a foot blade as well as a foot plate 15. The prosthesis ankle according to this
35 embodiment is instead provided with a bottom member 15', which forms a counter surface for the forward piston.

This bottom member 15' is provided with a bolt 27 fitted thereto.

5 Such as schematically shown in Fig. 11, this prosthesis ankle may in a simple manner be used together with artificial foots already available on the market, in that they by means of a washer 28 and a nut 29 can be attached in a recess in the artificial foot 30, such as illustrated.

10 In Fig.s 12a-e is schematically illustrated how the prosthesis joint according to the invention can be built together with a second joint axis, provided substantially at right angle to the joint axis of the prosthesis joint according to the invention. When using the prosthesis joint
15 as a foot prosthesis in this manner it is obtained a possibility also to incline the foot joint laterally. In Fig. 12a thus it is shown in a view straight from the front (or straight from the rear side) the rotational axis 7 at the prosthesis joint according to the invention, whereby the
20 supporting bracket 31 for this rotational axis 7 is pivotably supported about a pivot journal 32, which extends substantially perpendicularly to the rotational axis 7. In this figure is shown how the joint can be inclined laterally about the pivot journal 32, and in Fig. 12b is illustrated
25 the corresponding inclination in the opposite direction. In this manner it is possible well to adjust a foot joint angularly, such as e.g. corresponds to normal inclination of the foot joint when the feet are positioned wide apart from each other.

30

In Fig. 12c is shown the supporting bracket 31 and the pivot journal 32 from the side and from this view it also can be seen how a recess 34 is provided between the supporting bracket 31 and a base plate 33, in which recess is
35 positioned a dampening block 35, e.g. made from polyurethane. Such dampening blocks, which are shown in Fig. 12d are inserted from each side of the recess 34 and dampen

8

under compression lateral swinging motions, as can be seen from Fig. 12a and 12b.

In Fig. 12e is shown the further joint in a view from above.

5

The invention is not limited to the embodiments shown and described in connection thereto, but modifications are possible within the scope of the accompanying claims.

CLAIMS

1. An adjustable prosthesis joint, such as a prosthesis ankle or a prosthesis foot, and intended primarily for causing setting of the angular relation between an attachment means (4) forming part thereof for affixing the prosthesis joint (1, 21) to a cooperating body part, and a detail (17, 19, 15') being angularly displaceably connected thereto, whereby the prosthesis joint is provided with means adapted to be actuatable to permit or to prevent such angular displacement, respectively,
c h a r a c t e r i z e d t h e r e i n ,
that said means is constituted by two communicating chambers (3a, 3b) containing a flow medium, with a shiftable valve (13, 23) provided between the chambers, and at least one body designed as a piston (8, 9), rotatably arranged in relation to said chambers and movably arranged therein and adapted to permit flow of flow medium between the two chambers, when the valve is open and under influence of an external shifting force being displaced in said chambers (3a, 3b) in order to alter the relative sizes thereof.

2. Prosthesis joint as claimed in claim 1,
c h a r a c t e r i z e d t h e r e i n ,
that the communicating chambers are provided in a housing (2) in form of a substantially cylindrical, cross-sectionally circularly curved chamber (3), having an intermediate wall (5, 5'), by which the chamber (3) is subdivided into two cylindric curved chamber portions (3a, 3b) situated one after the other, and that the valve (13, 23) is provided in a valve housing (11) in connection to the intermediate wall (5, 5').

3. Prosthesis joint as claimed in claim 2,
c h a r a c t e r i z e d t h e r e i n ,
that each chamber portion or cylinder (3a, 3b) is provided with its own piston (8 and 9, resp.), moveable therein,

10

which pistons are interconnected and together adapted to be uniformly displaced in relation to said intermediate wall (5, 5') under flow of flow medium through the valve (13, 23) between said cylinders.

5

4. Prosthesis joint as claimed in claim 3
c h a r a c t e r i z e d t h e r e i n,
that it is equipped with means (17, 19, 15') forming part of
and/or being attachable to an artificial foot.

10

1:5

FIG. 1


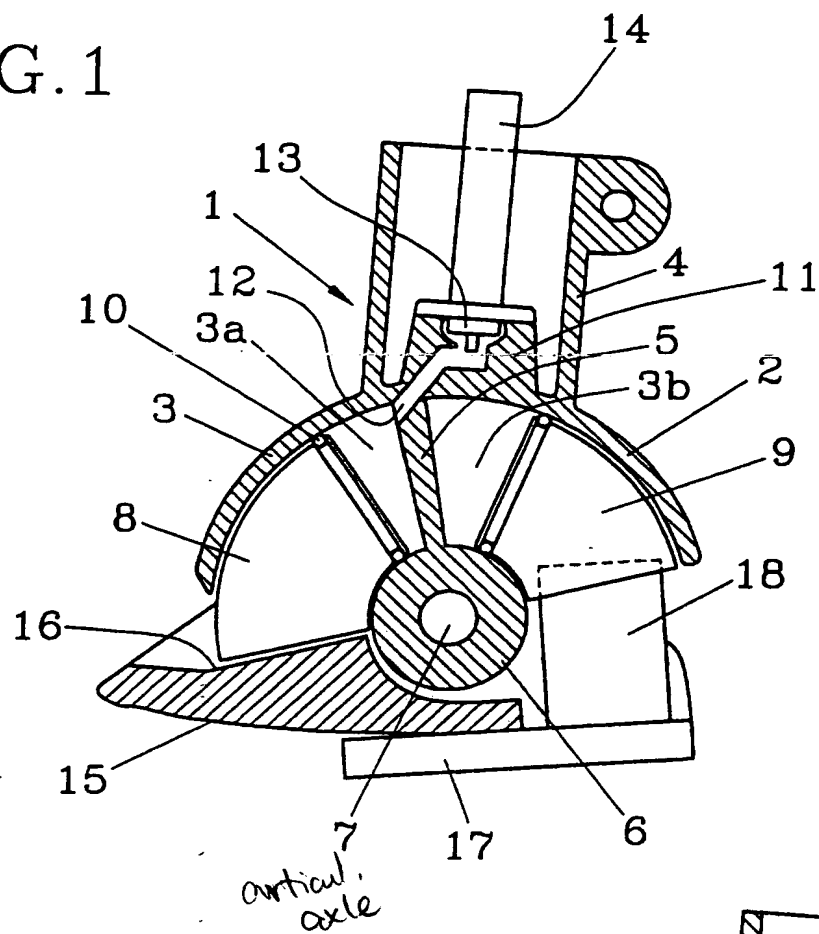


FIG. 2

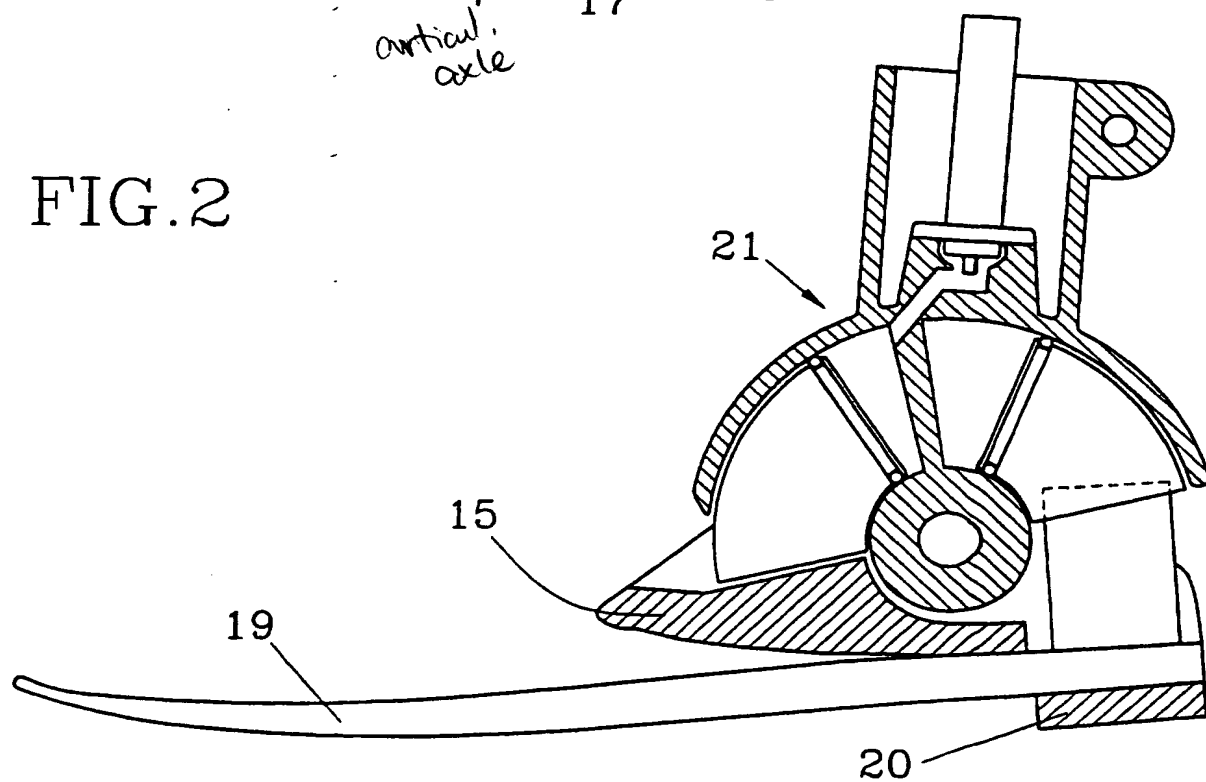

2:5

FIG.3


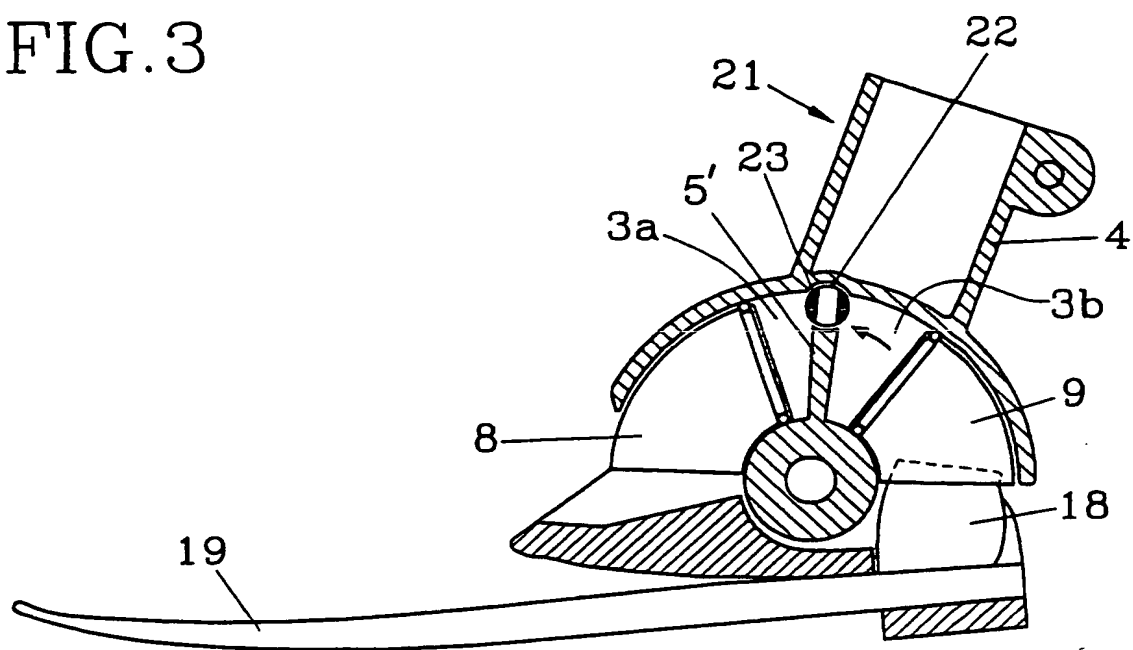


FIG.4

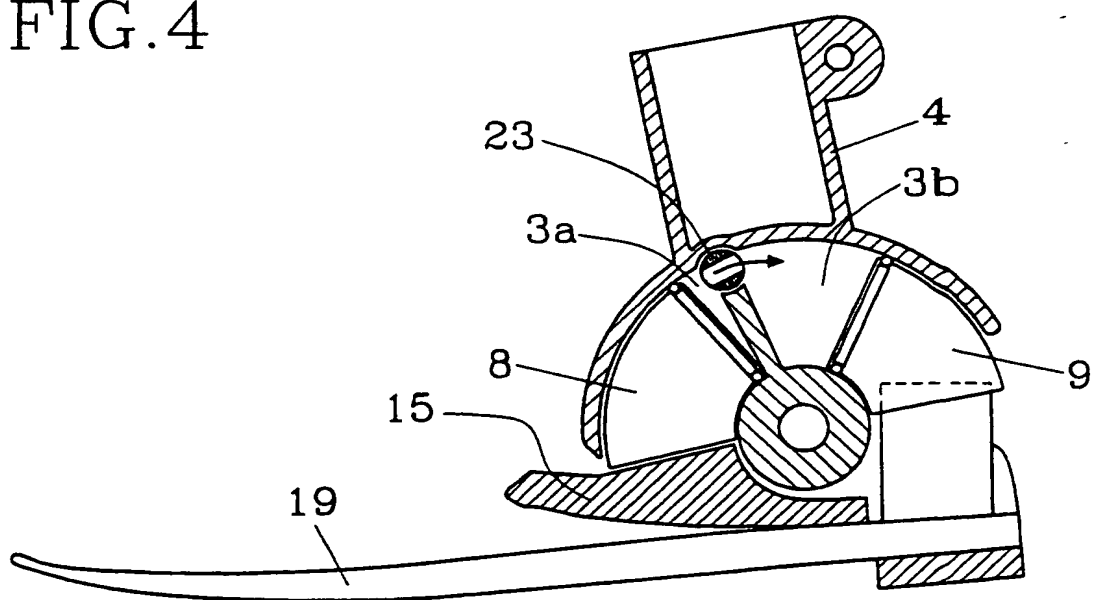

3:5

FIG. 5

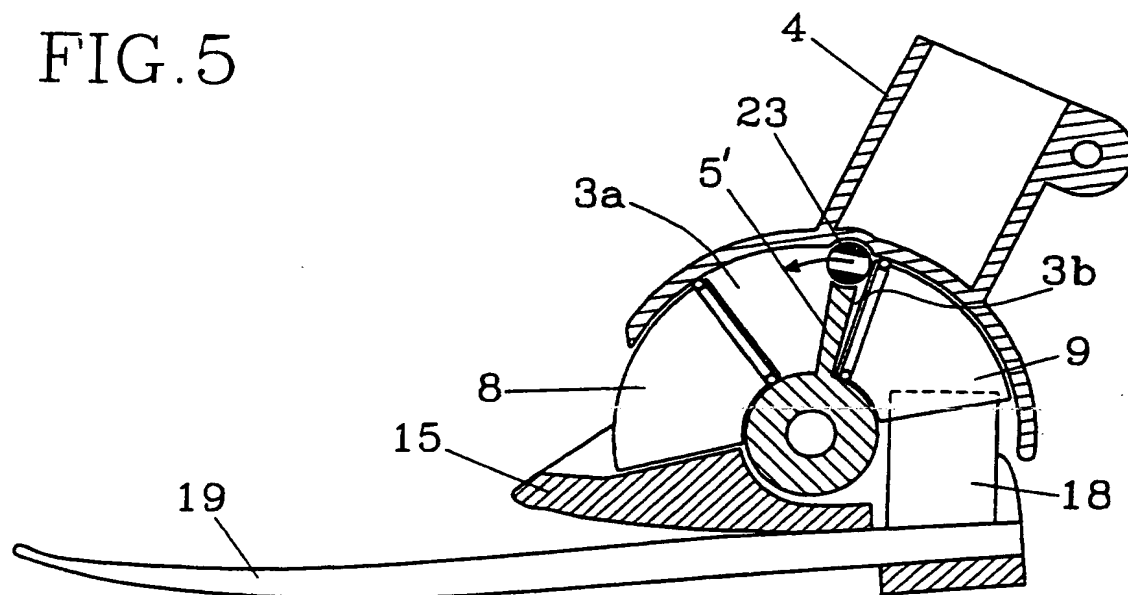


FIG. 6


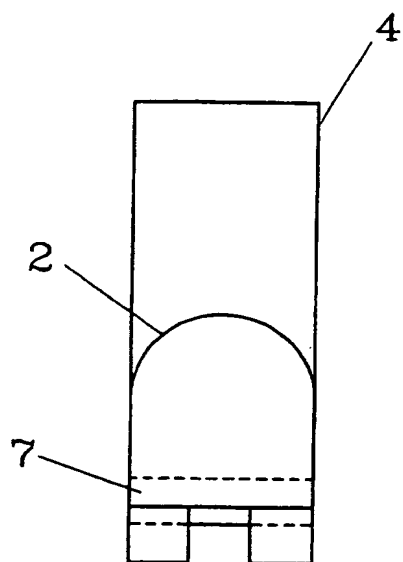


FIG. 7

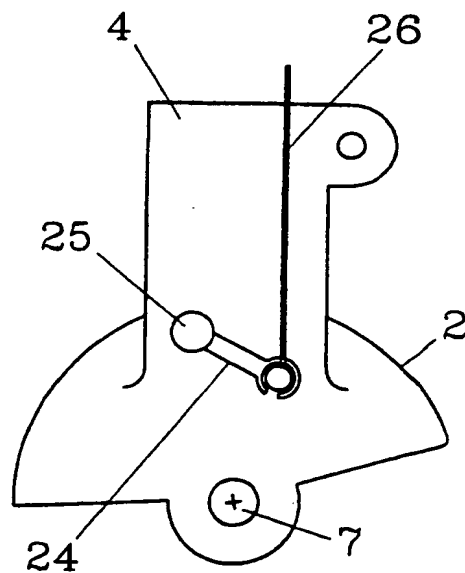

4:5

FIG. 8

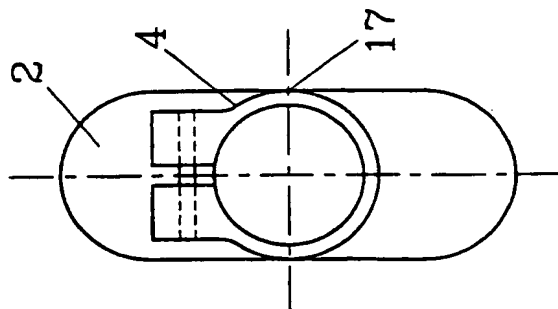


FIG. 9

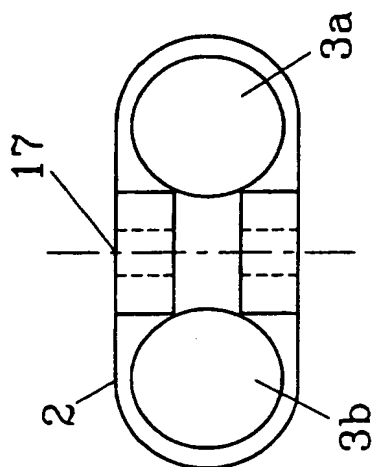


FIG. 10


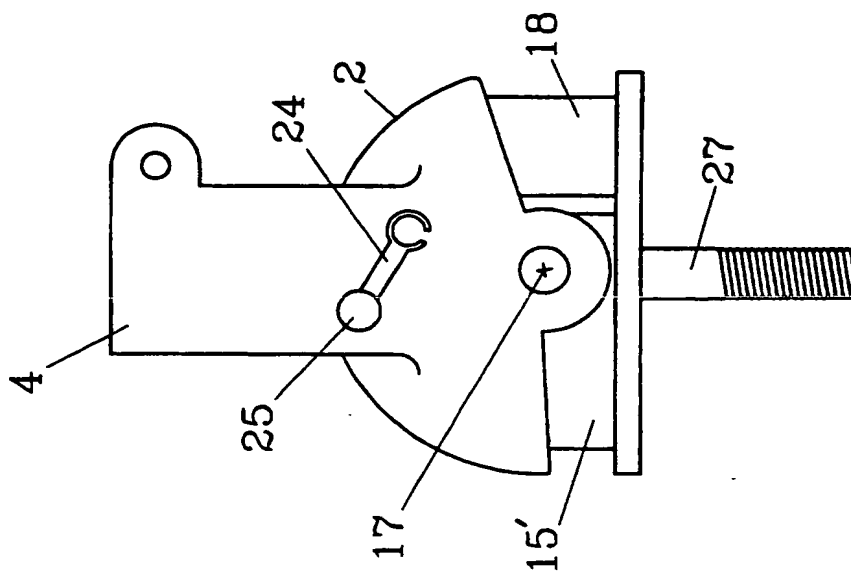


FIG. 11

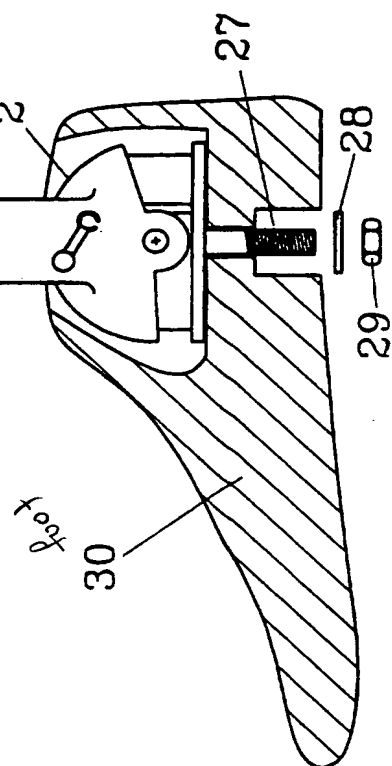

5:5

FIG. 12a

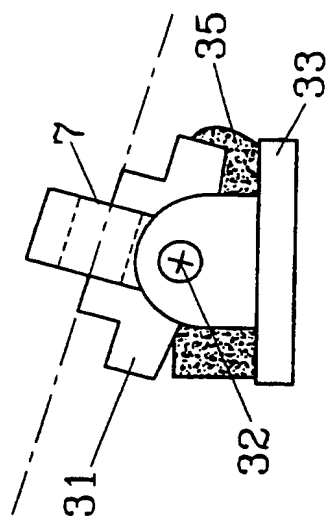


FIG. 12b

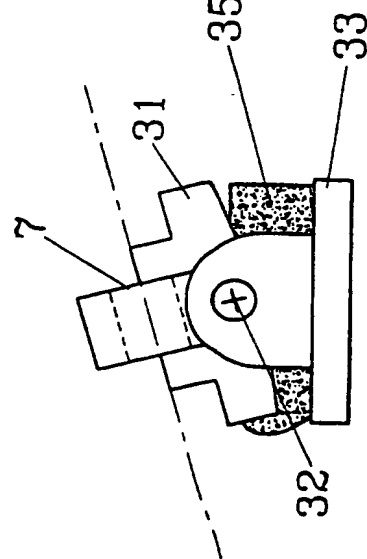


FIG. 12d




FIG. 12c


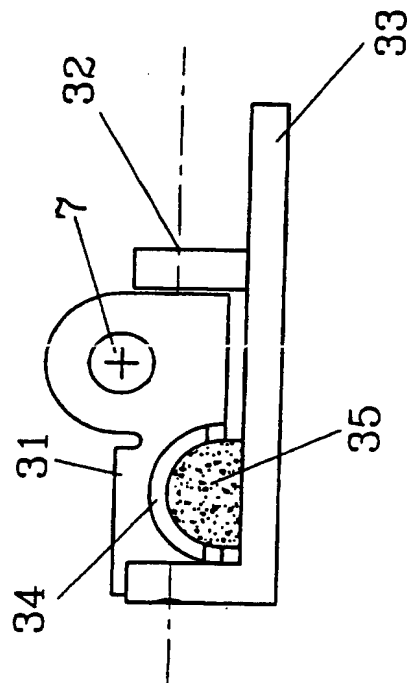


FIG. 12e

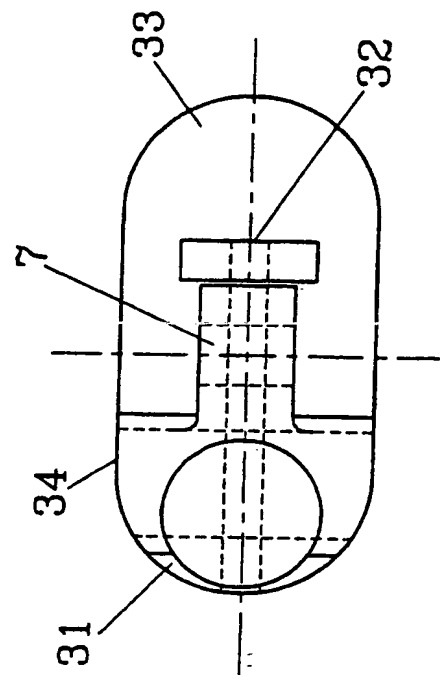

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 96/00215

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A61F 2/66

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A61F, F16F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

QUESTEL 2

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 818828 A (ALBERT SCHWARZ), 29 October 1951 (29.10.51), figure 1, claims 1-2 --	1-4
Y	GB 762695 A (VOKES ERNST SCIENTIFIC SURGICAL APPLIANCES LIMITED), 5 December 1956 (05.12.56), page 2, line 9 - line 88, figures 1-4 --	1-4
Y	US 2470480 A (S.R. FOGG), 17 May 1949 (17.05.49), column 3, line 64 - column 4, line 32, figure 1 --	1-4
E	SE 9400380-3 A (JAN BERNHARDSSON), 5 August 1995 (05.08.95) -- -----	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 July 1996

Date of mailing of the international search report

04-07-1996

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Leif Brander

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/96

International application No.
PCT/SE 96/00215

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE-A-	818828	29/10/51	NONE	
GB-A-	762695	05/12/56	NONE	
US-A-	2470480	17/05/49	NONE	
SE-A-	9400380-3	05/08/95	NONE	

THIS PAGE BLANK (USPTO)